

FIG. 1 is a schematic diagram of a system 100 for providing a user with a personalized audio experience. The system 100 includes a user interface 102, a processor 104, and a speaker 106. The user interface 102 is configured to receive input from a user and provide output to the processor 104. The processor 104 is configured to process the input and generate a personalized audio signal. The speaker 106 is configured to output the personalized audio signal to the user.

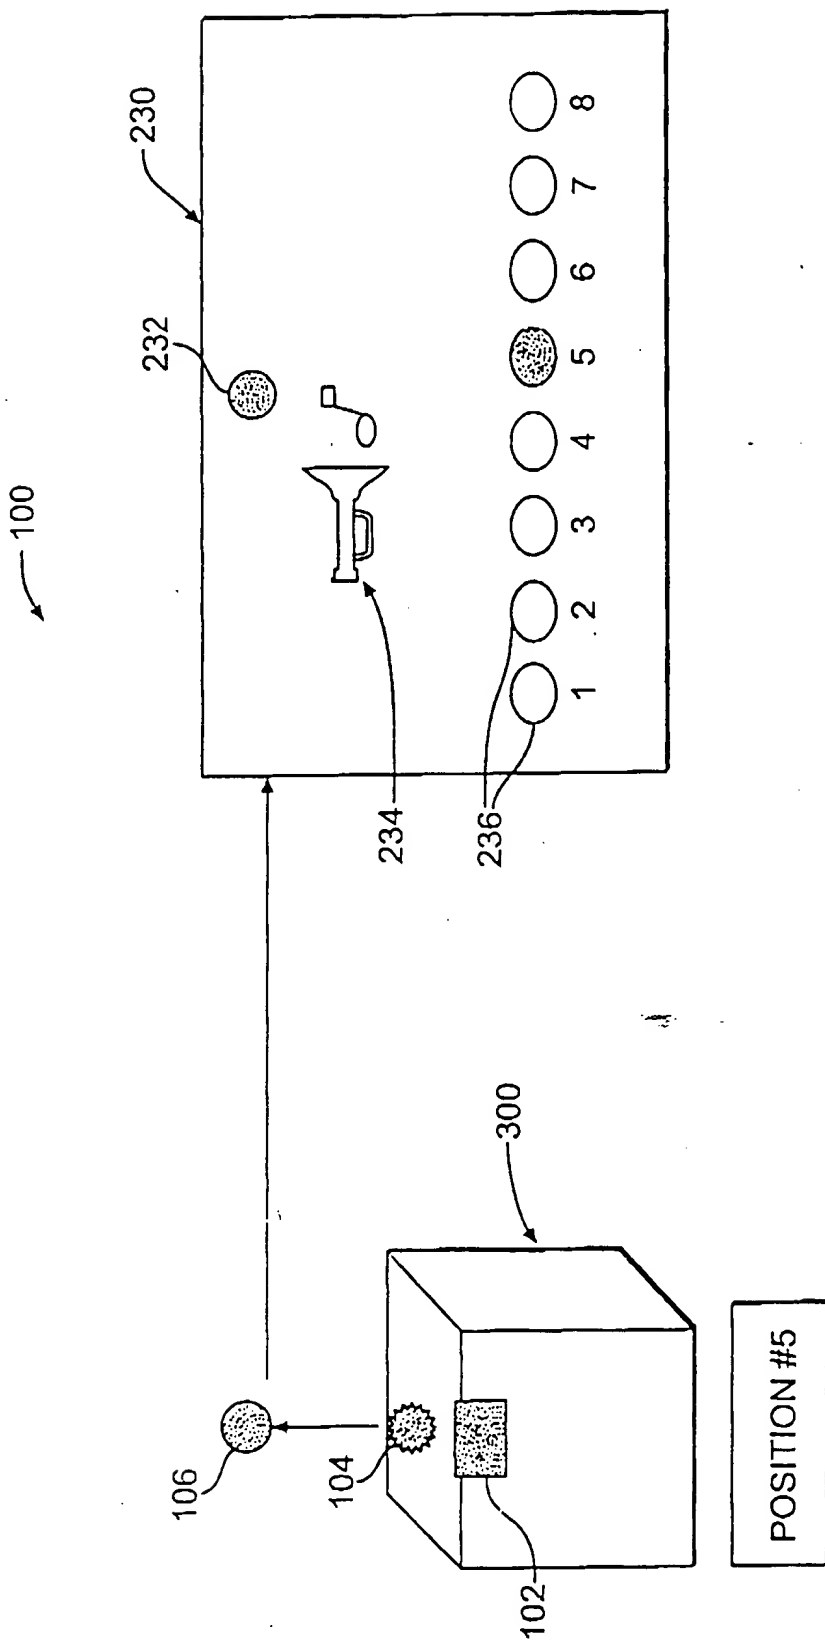


FIG. 1

FIG. 2 is a perspective view of the device 100 in a closed position.

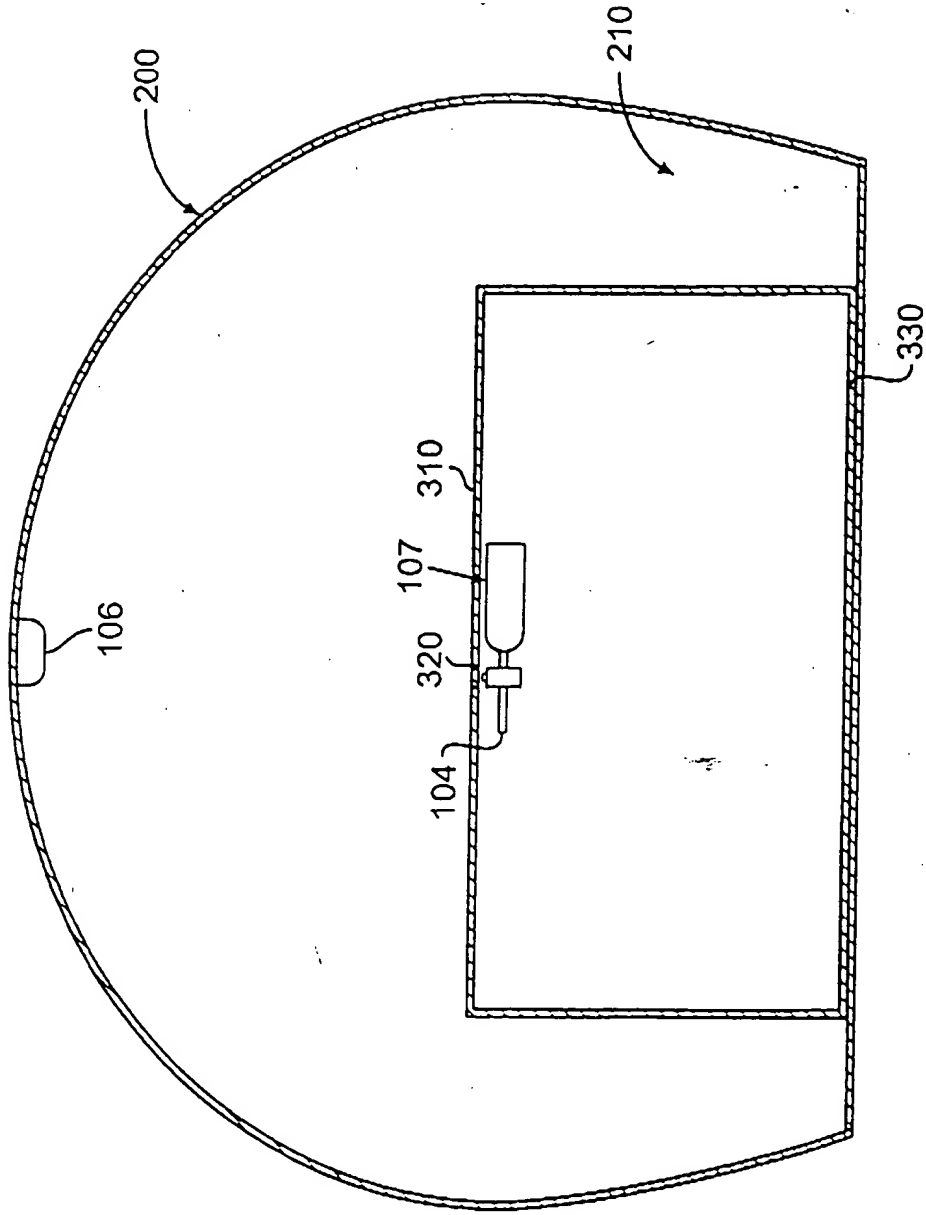


FIG. 2

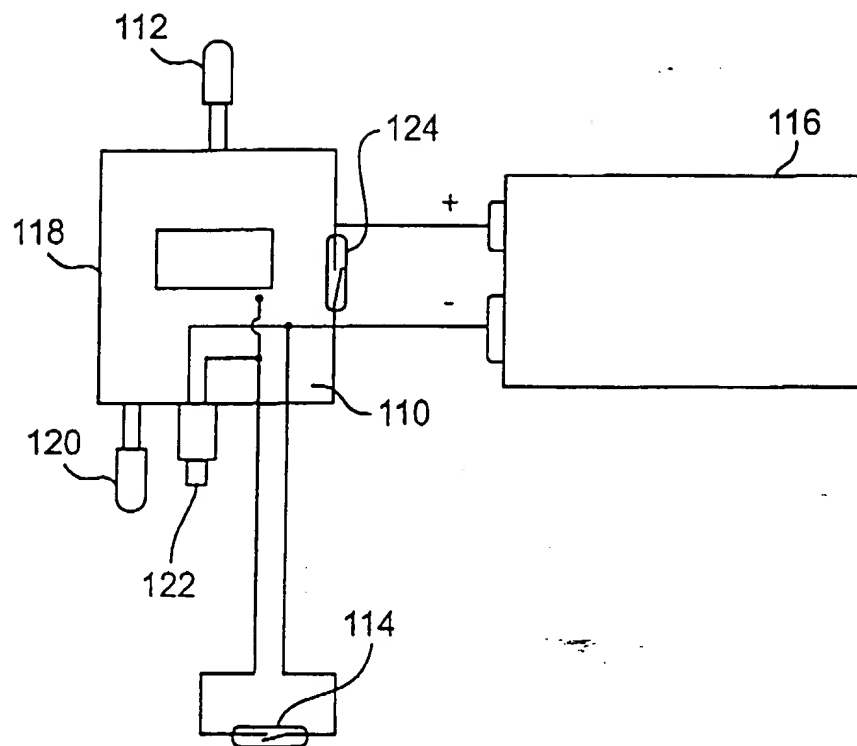


FIG. 3

FIG. 4 is a perspective view of the device 100 in a closed position, showing the handle 102 and the shaft 106. The handle 102 is connected to the shaft 106 via a coupling 112. The shaft 106 is connected to a distal end 132, which includes a tip 144 and a proximal end 150. The device 100 is shown in a closed position, with the handle 102 and the shaft 106 aligned.

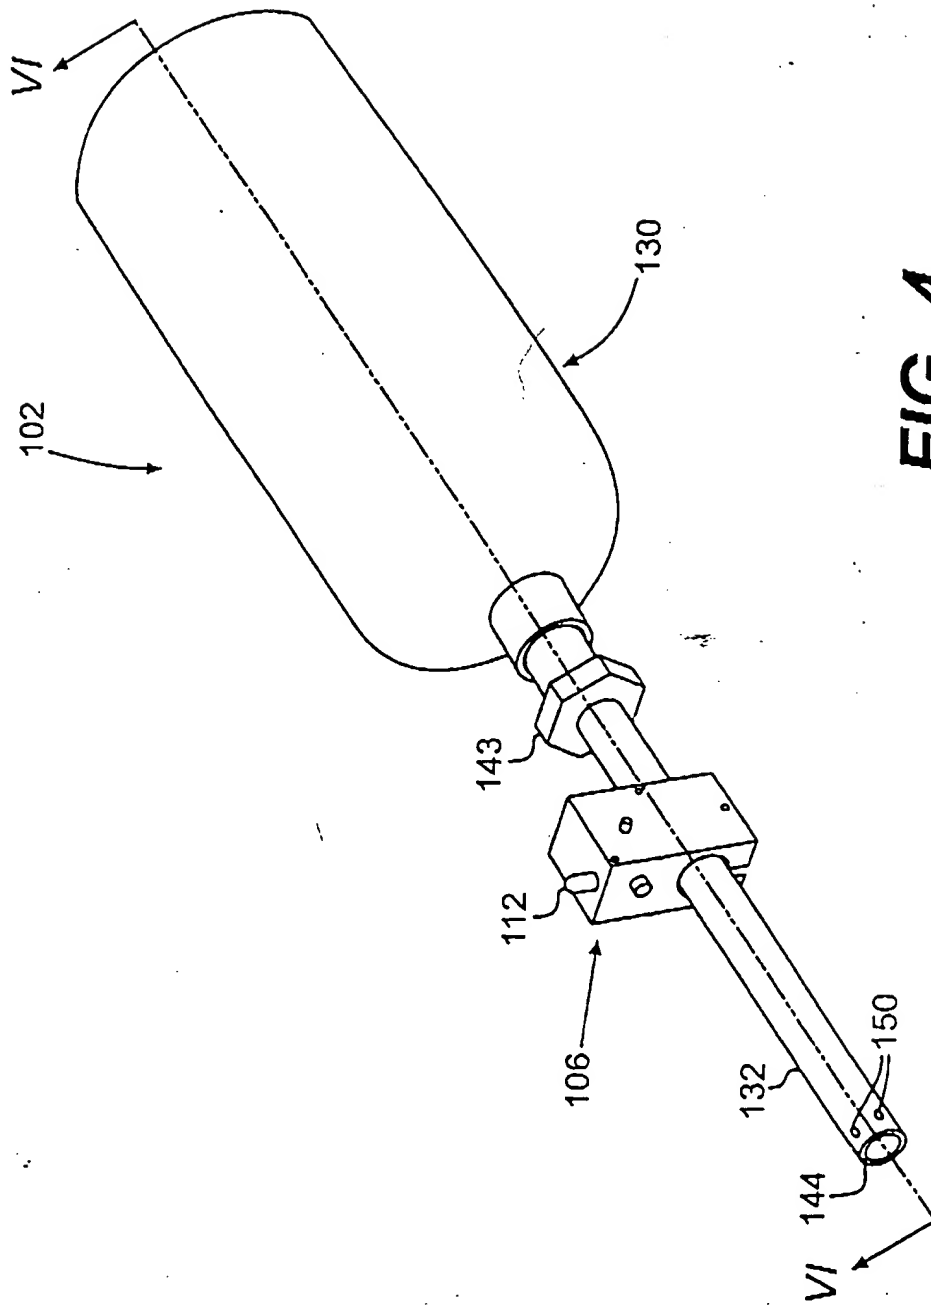


FIG. 4

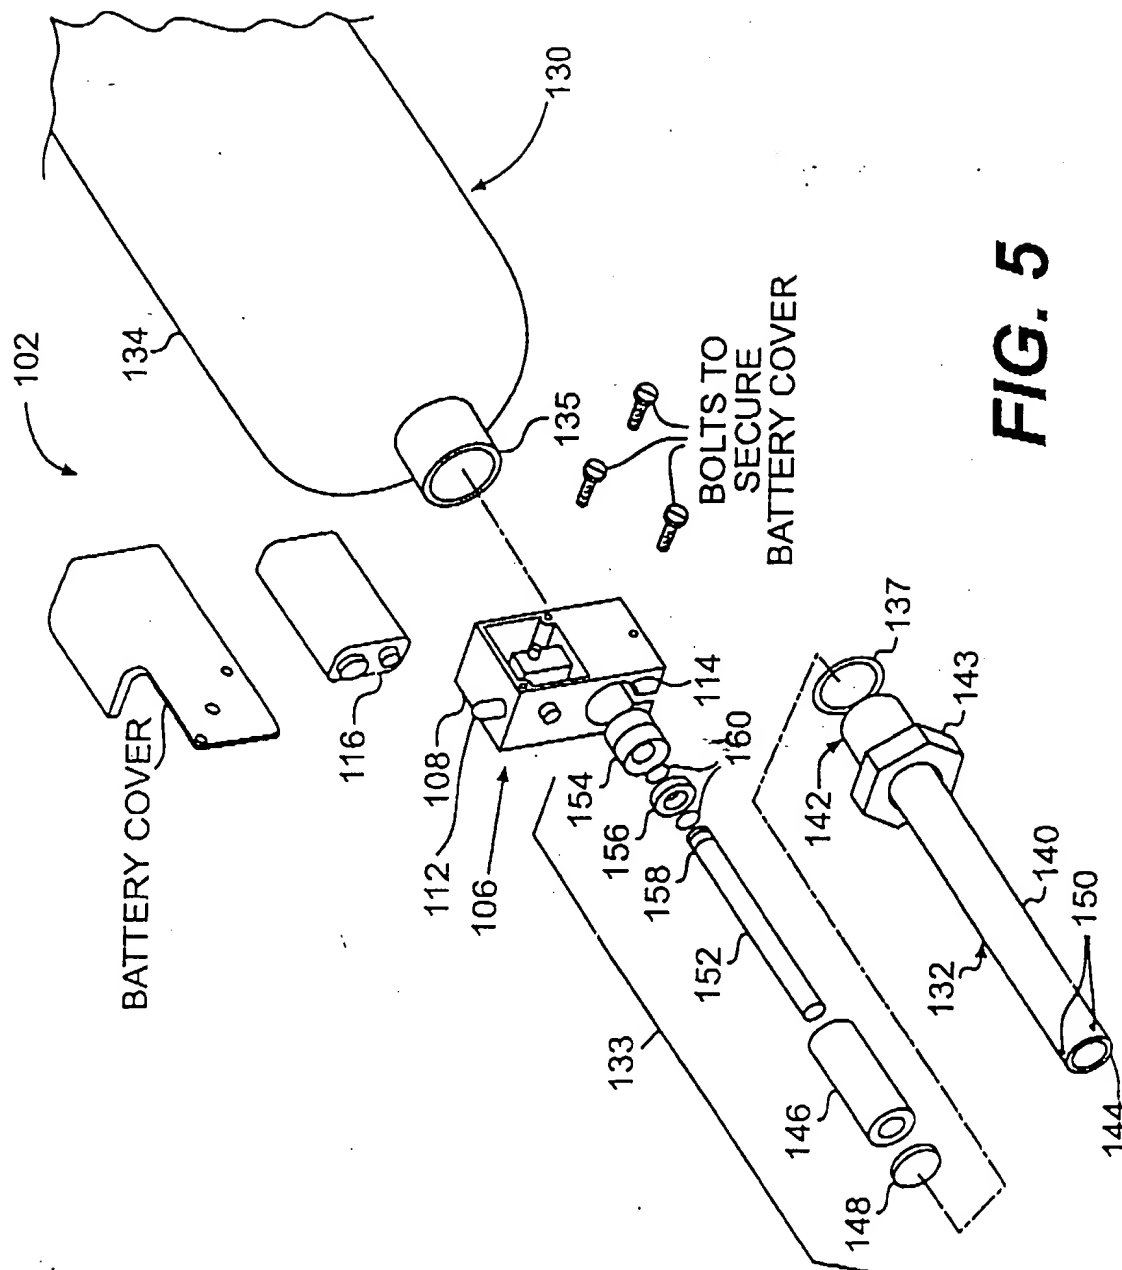


FIG. 5

FIG. 7

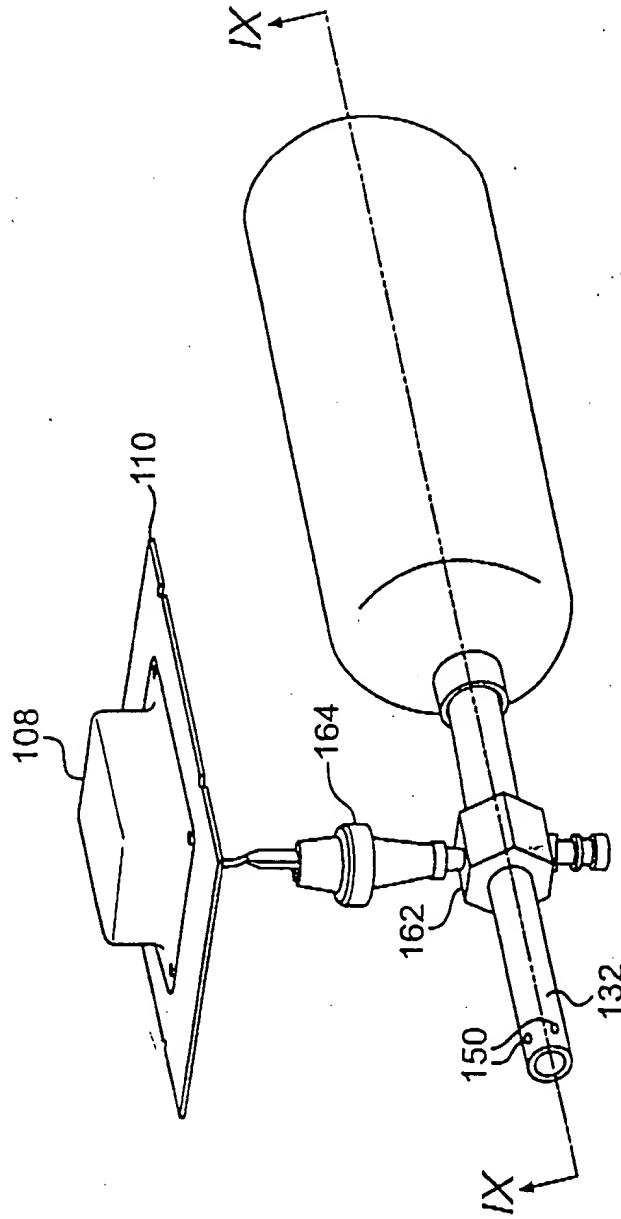


FIG. 7

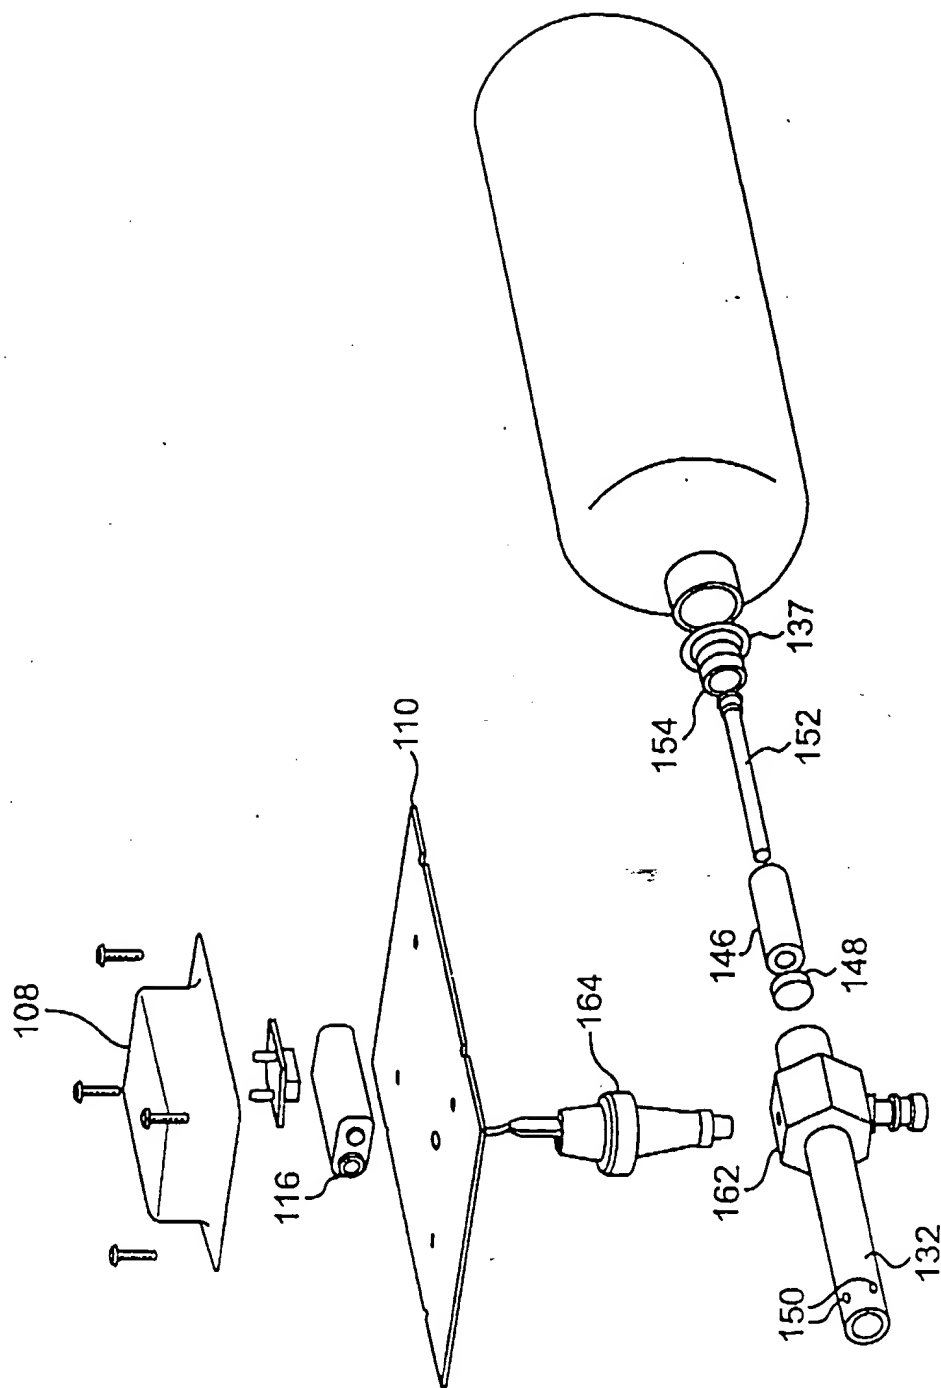


FIG. 8

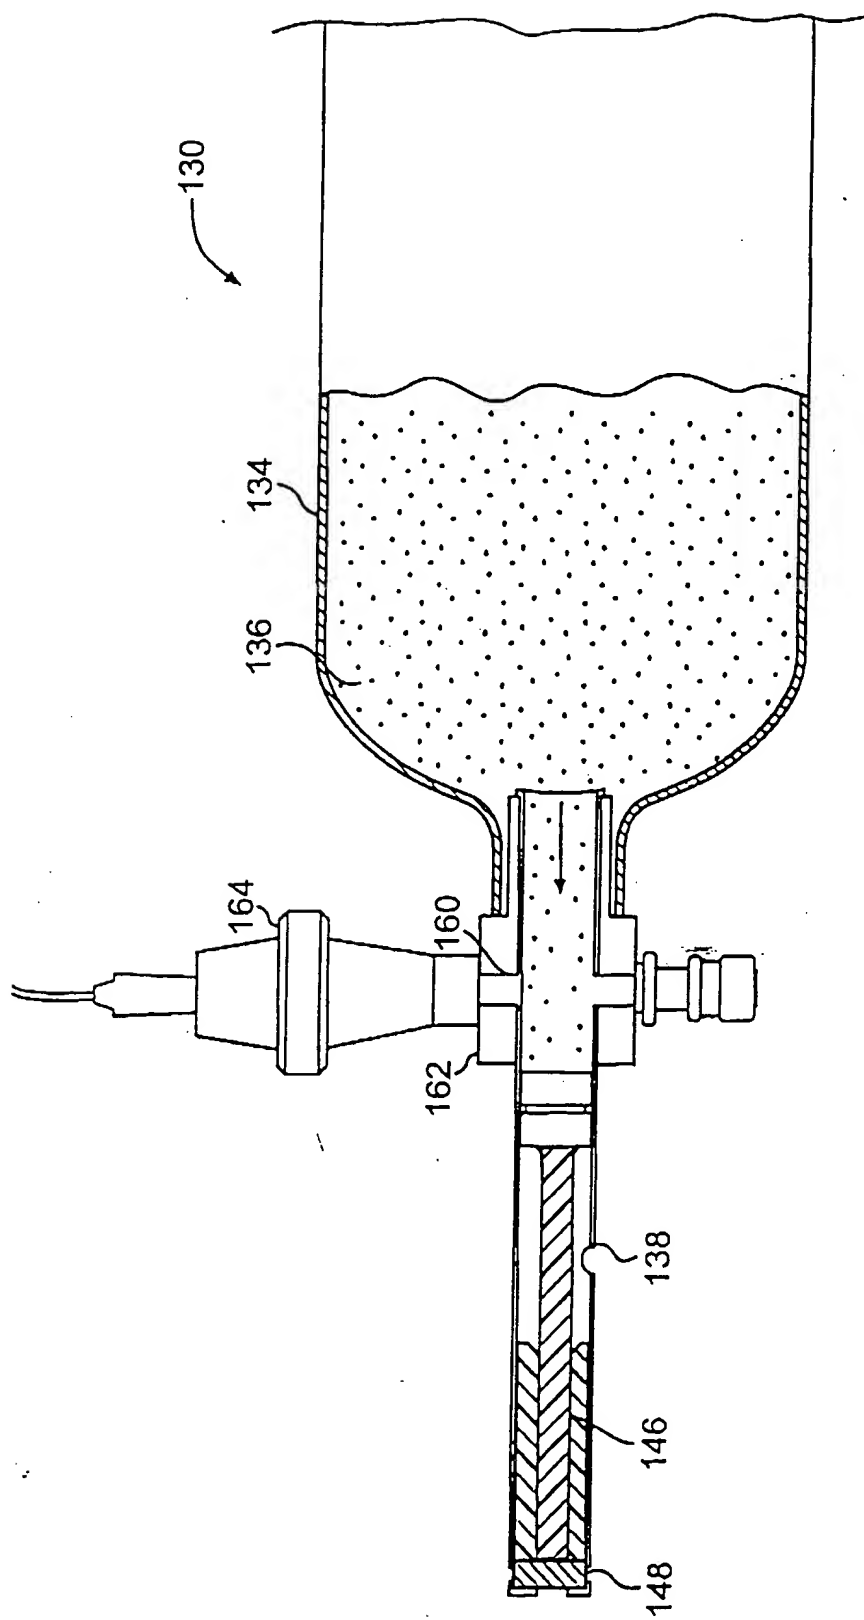


FIG. 9A

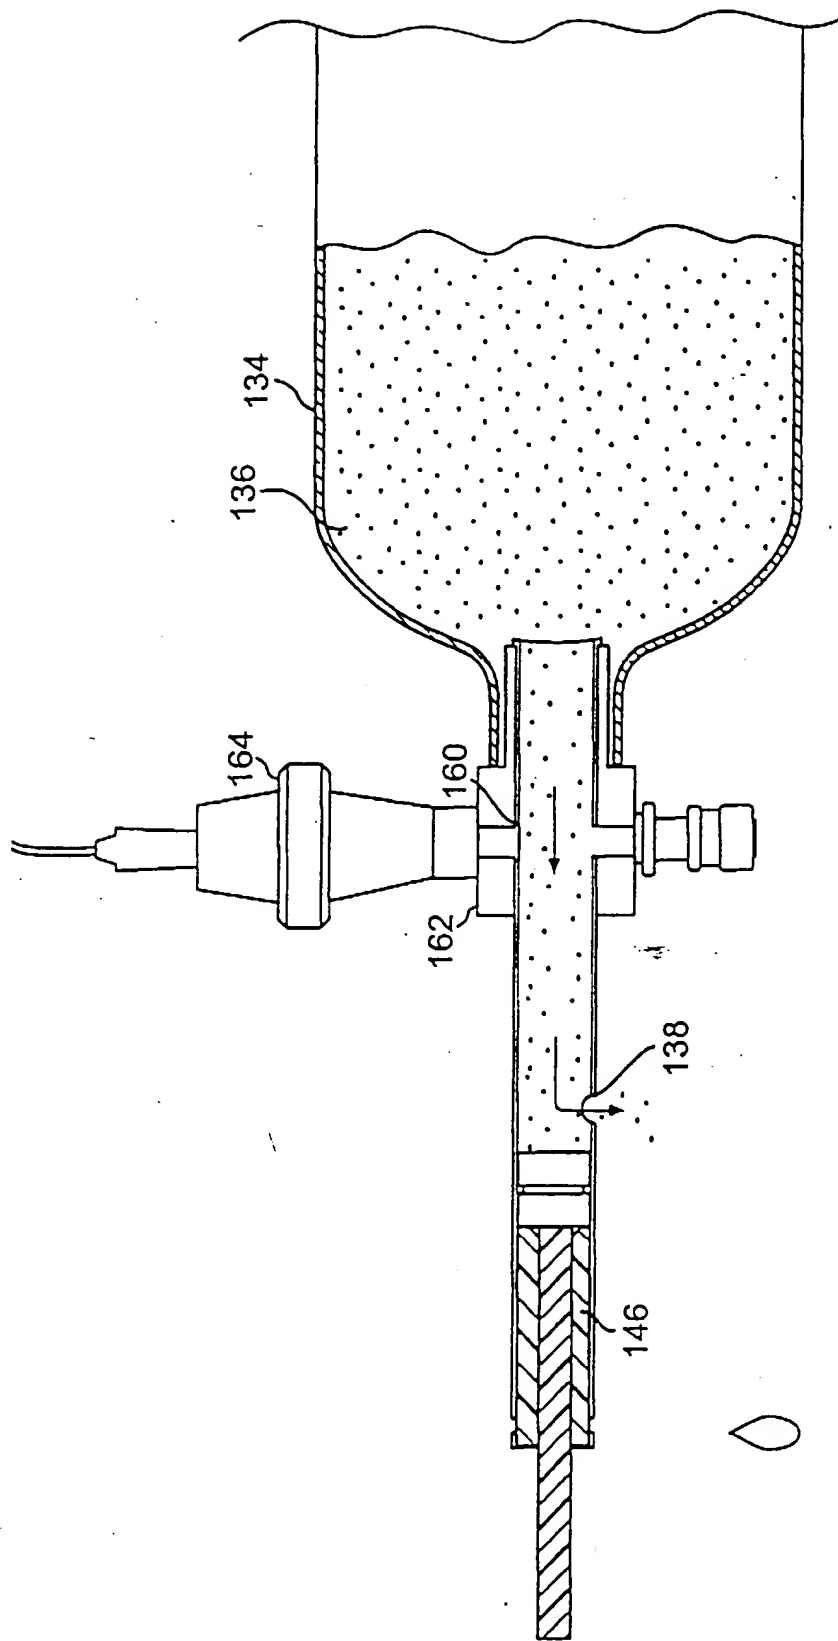


FIG. 9B

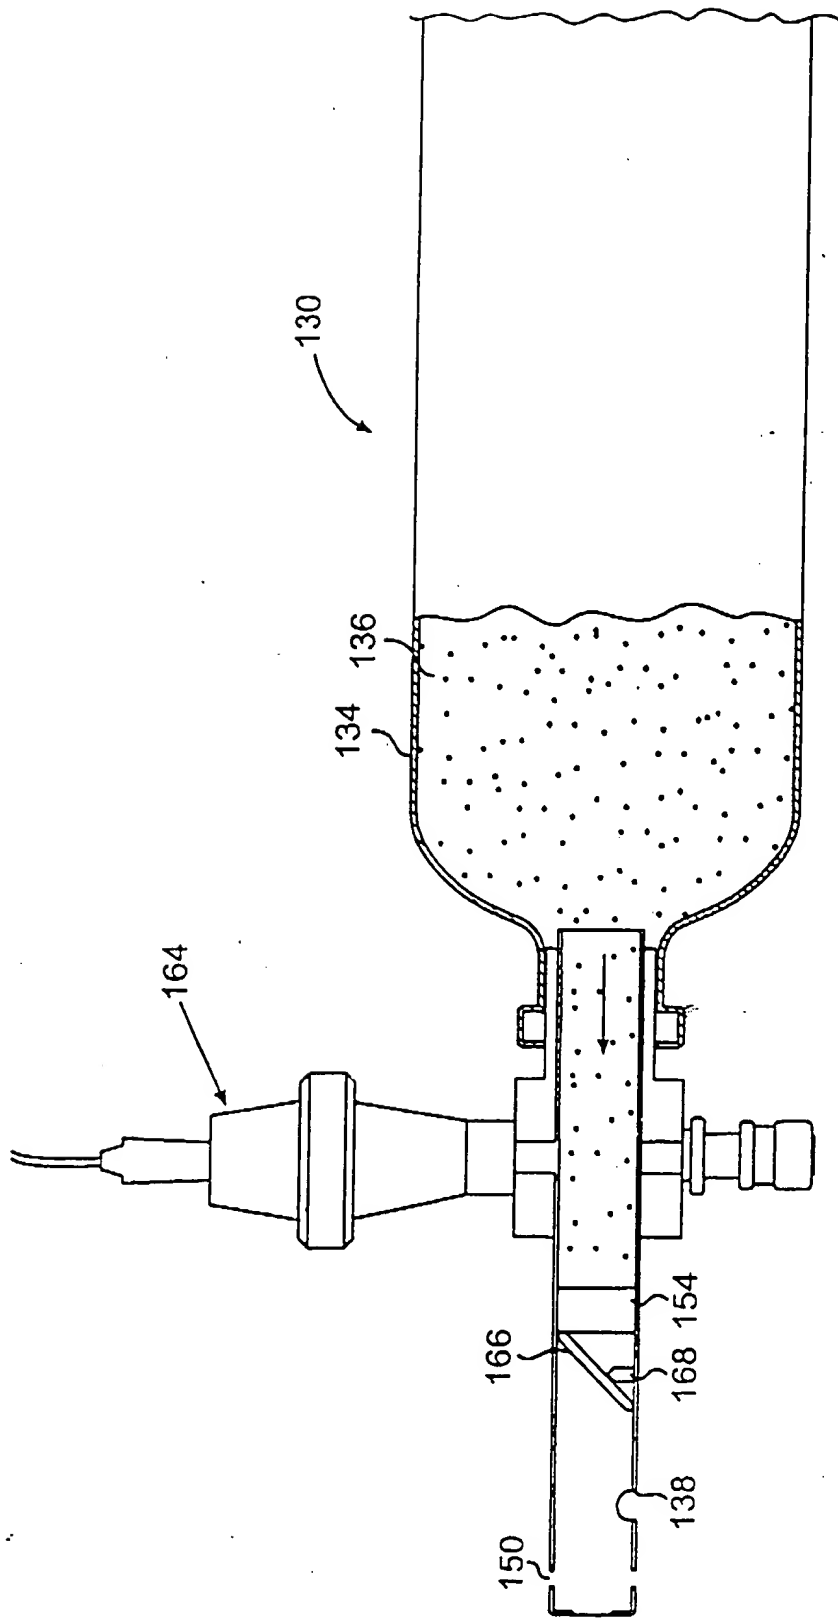


FIG. 10

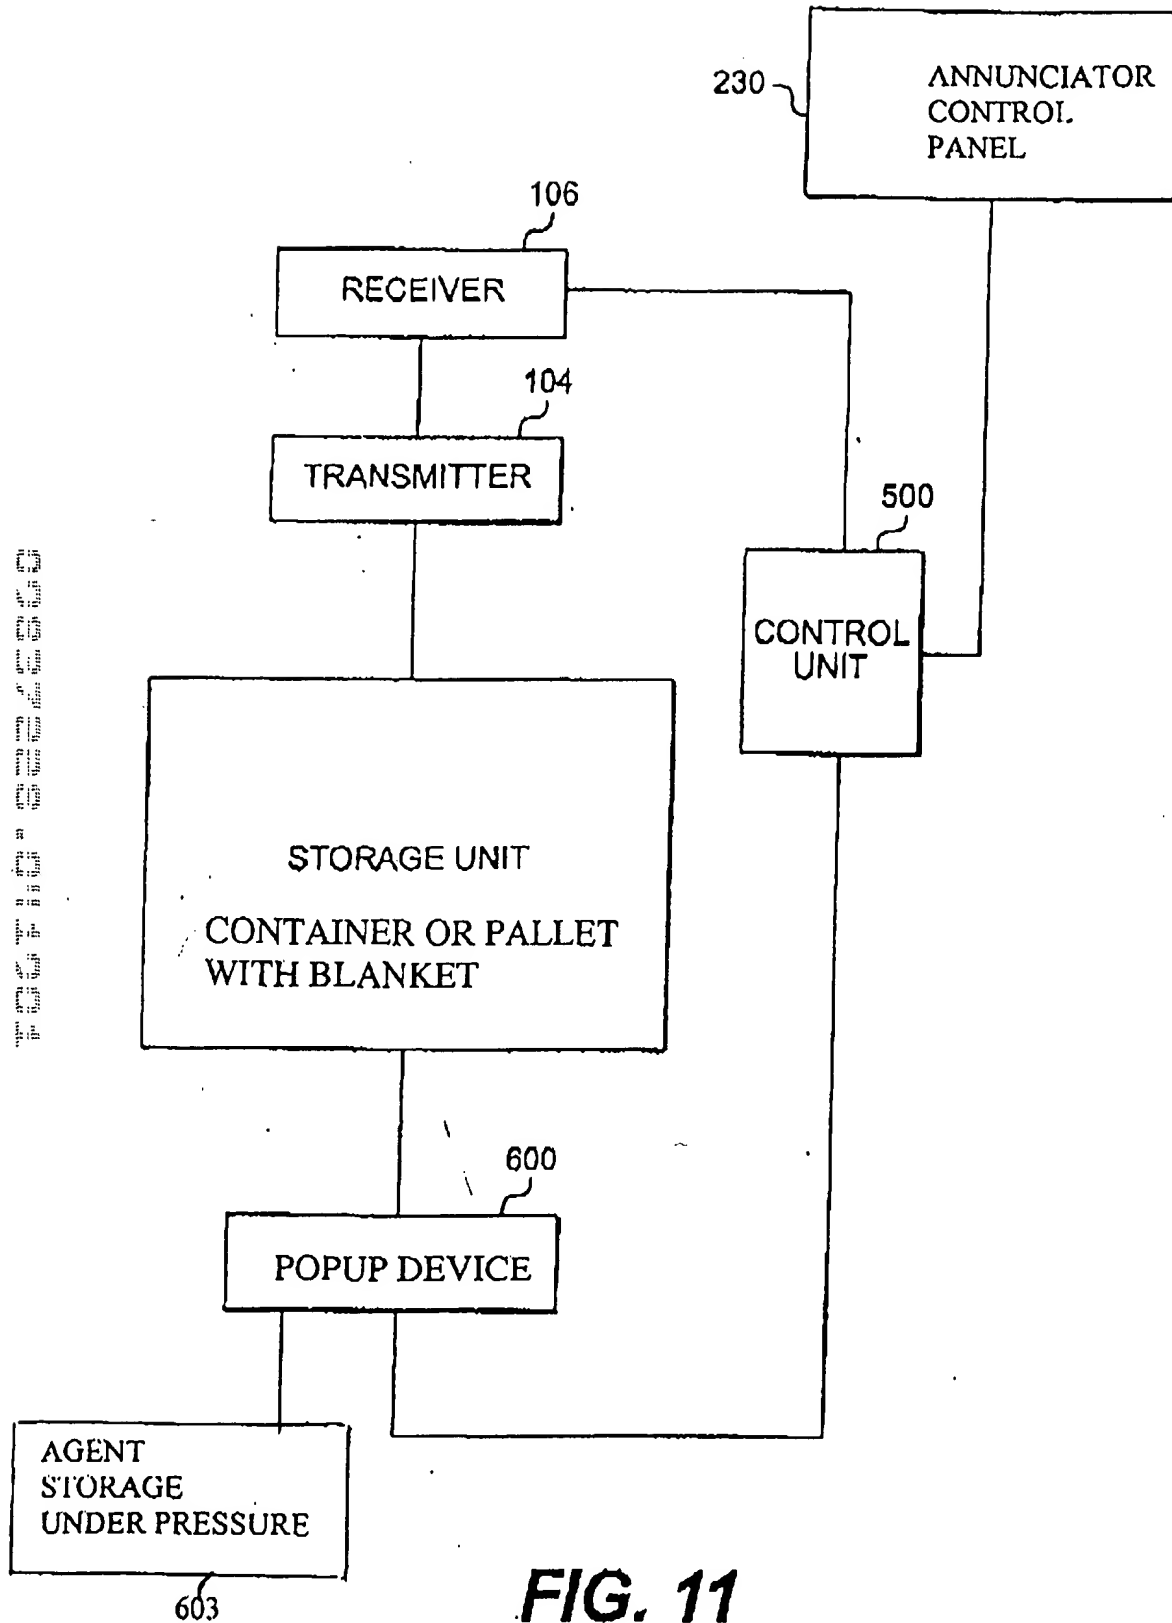


FIG. 11

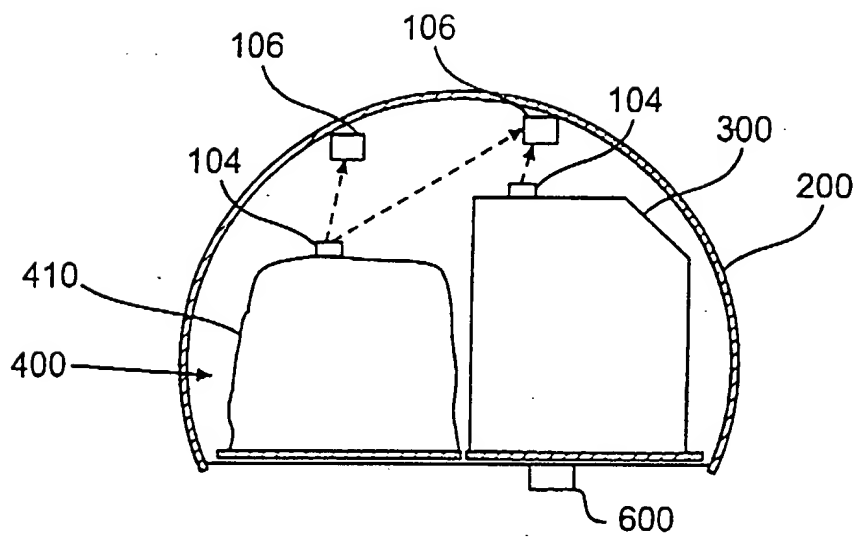


FIG. 12

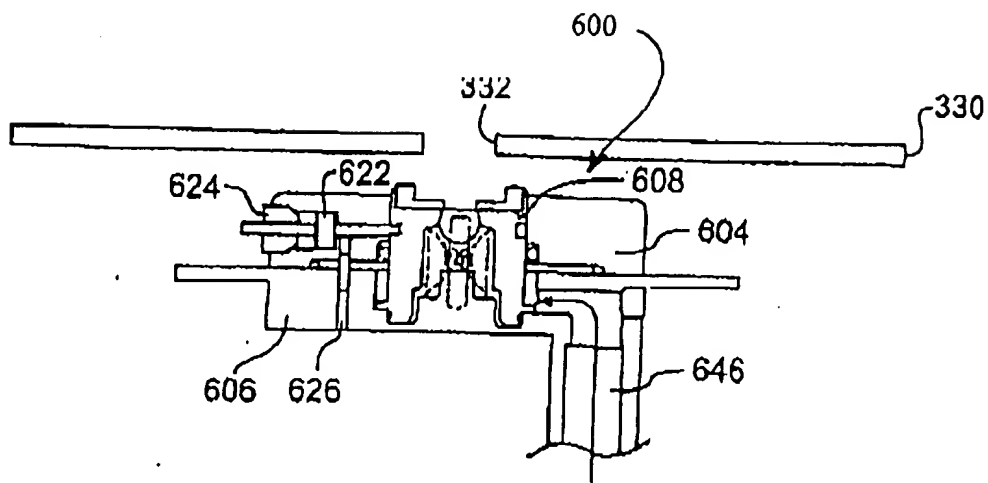


FIG. 14A

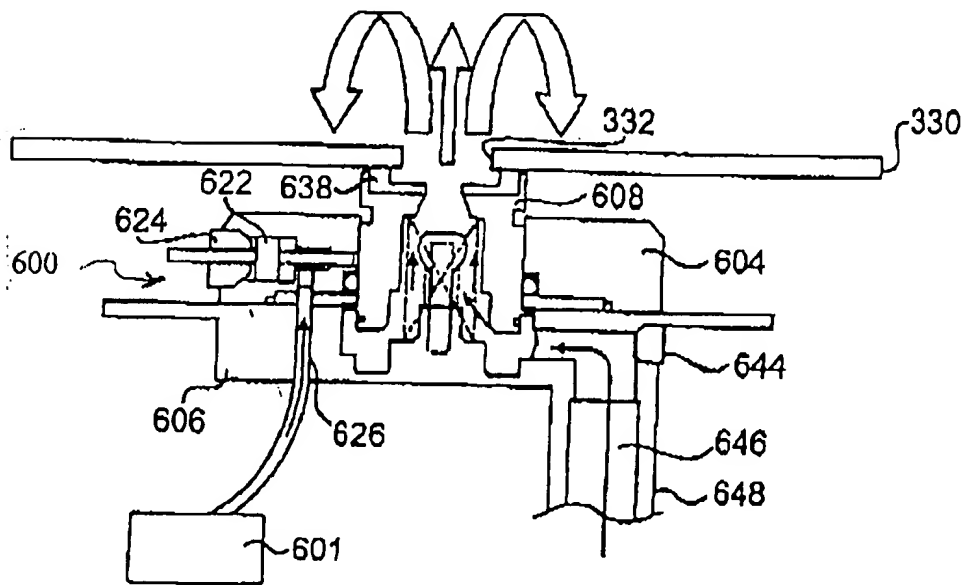


FIG. 14B

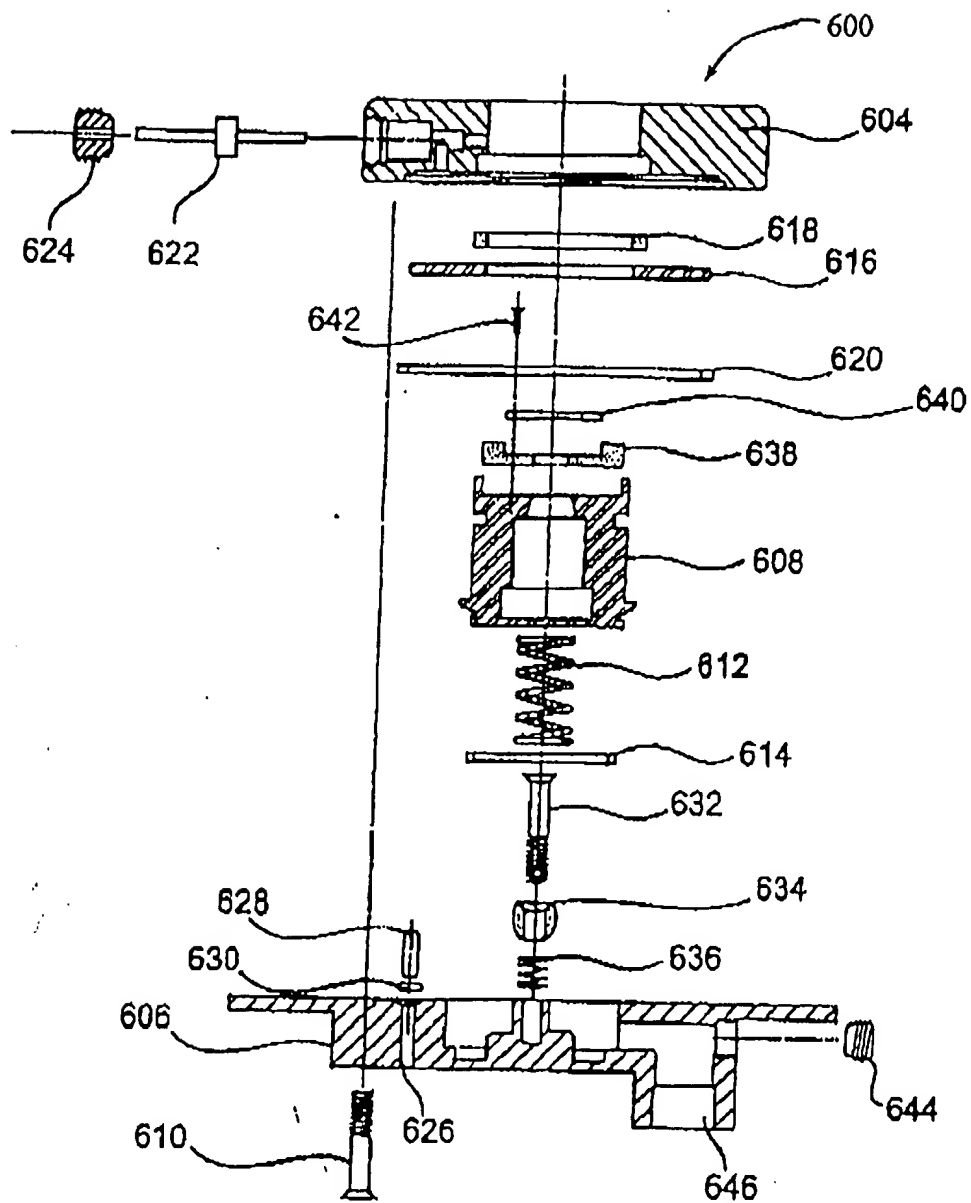


FIG. 15

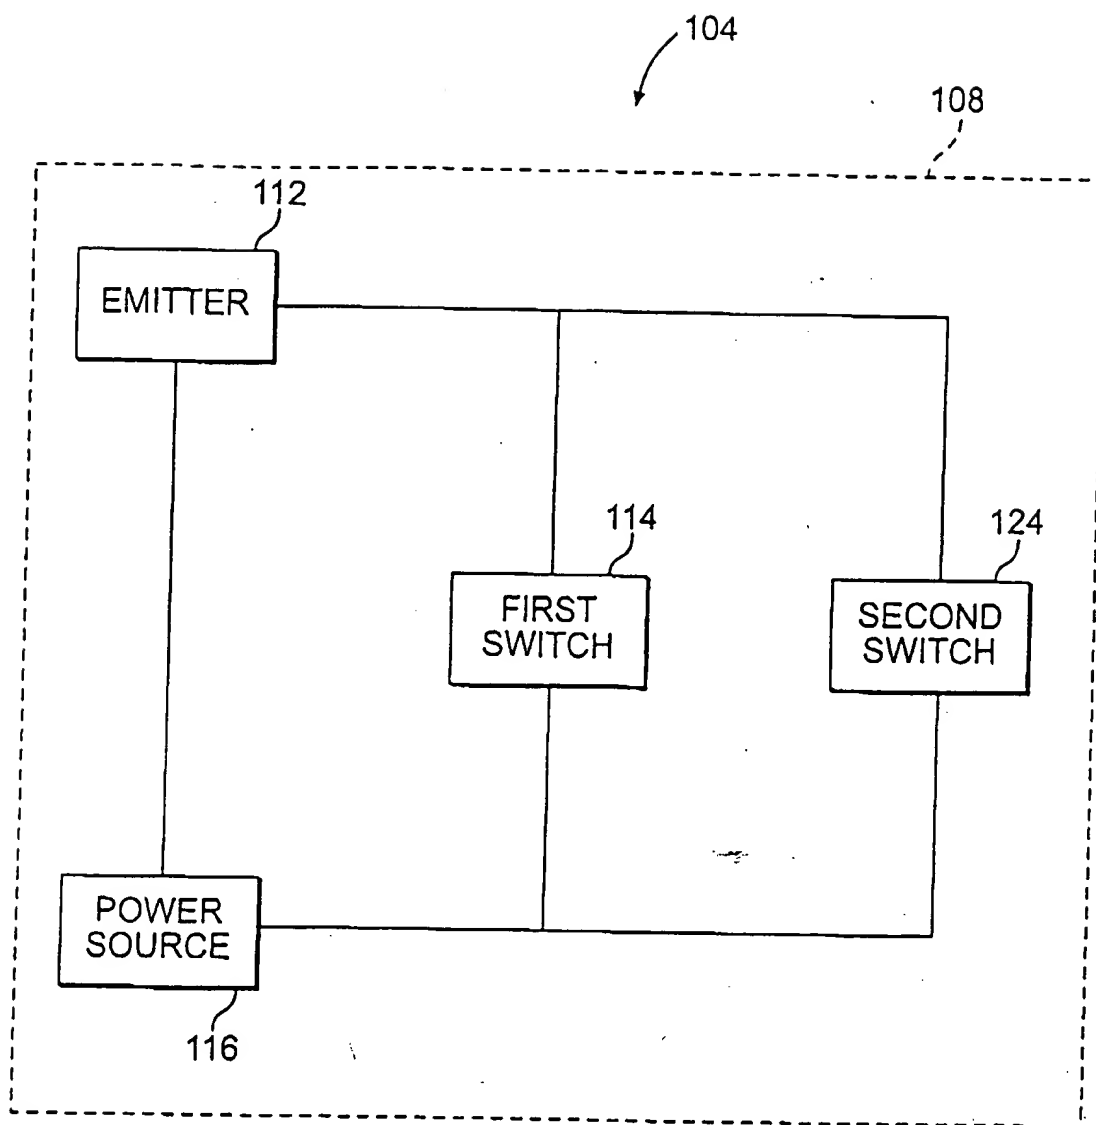


FIG. 16